



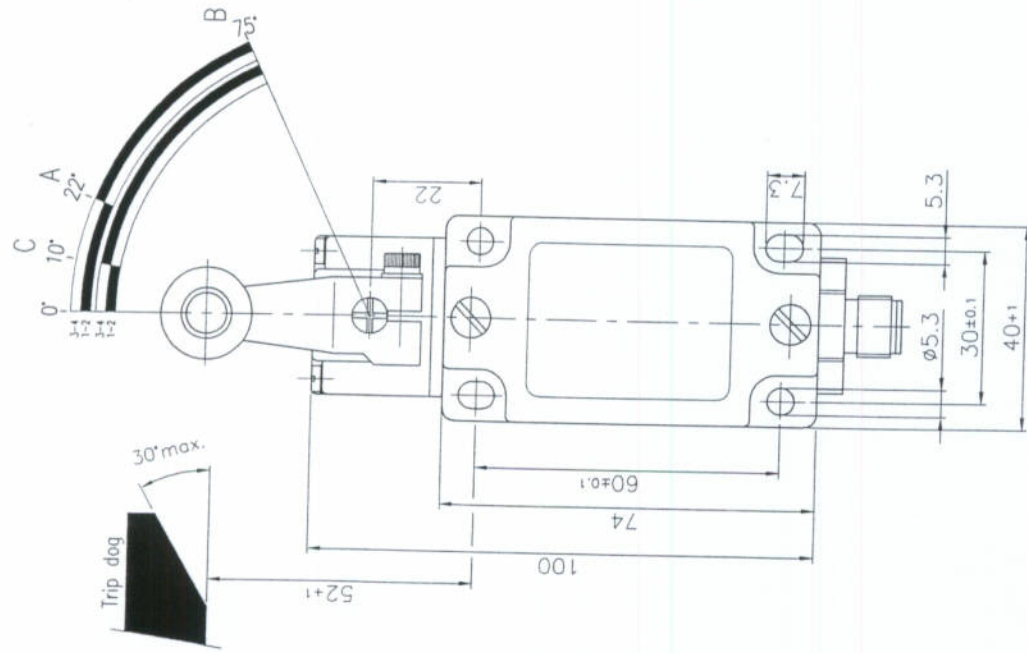

A = Operating point
B = Final position
C = Reset point

Connection diagram

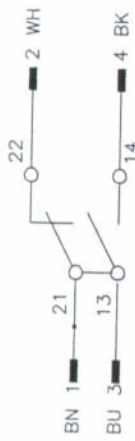

- 4 POS.
PIN ASSIGNMENT
1. — BN (Brown)
2. — WH (White)
3. — BU (Blue)
4. — BK (Black)

Switch Element	ES-510 Snap action with 1NO + 1NC contact			
Current Rating	10A, 250V~			
Short circuit protection	10A, HRC Fuse (External)			
Switch on point	22°±3° C			
Switch off point	10°±3° C			
Operating point reproducibility	±0.25°			
Operating force	10 N			
Approach speed (max)	60 m/min			
Switching frequency (max)	600 /min			
Environmental protection	IP 67			
Mechanical life	30x10 ⁶ Operations.			
TOLERANCES UNLESS OTHERWISE STATED		SUPERSEDED BY		
DIM. ±0.1	ANGLE ±1°			
ALL DIMENSIONS ARE IN MM.				
		2013	DATE	NAME
		DRN.	26/06	Ngan
		CHD.	26.6.18	Raj
No.	ALTERATION	DATE	NAME	
				SCALE
				1:1
				
				PAGE: 01
				OF: 01
		TITLE		DATA SHEET FOR
				NG2 HS-510-SEM4
		DRG. No.		5 204 4136
				
				TEKNIC
				d:\shoran ngdng\ngconnection\ngdng\